



# Inspire Neon Flex 0404 Top Bend

## Installation Instructions



### Quick Product Specs

- Bends up-and-down only
- 24V DC Input
- 3 Watts per Foot
- Cuttable Every 3.9"
- The tightest bend diameter is 3.9"
- 16FT (192") Max Run Length
- Max Operating Temperature: 32°F to 131°F (0°C to 55°C)
- Max Ambient Temperature: -13°F to 131°F (-25°C to 55°C)
- IP67 Indoor or Outdoor (this product is NOT UL676 rated)
- Dimensions (WxH): 0.4" x 0.4"

### Before You Begin

#### Project Planning & Layout

Due to the nature of this product, planning and laying out the project BEFORE installation is strongly recommended to minimize errors.

#### Product Modifications

Modifying this product beyond its intended use and/or construction is not recommended and voids the warranty.

#### Two-Person Installation

At least two people are recommended to install the Neon Flex – one person installing the product and another person holding the excess Neon Flex.

#### Do NOT twist

Twisting the Neon Flex may cause damage.

#### Do NOT bend side-to-side

This Neon Flex bends up-and-down only. Bending the Neon Flex in the wrong direction may cause damage.

#### Do NOT make sharp bends

Making sharp bends or bends tighter than the bend diameter may cause damage.

### Tools Required

Some tools may be optional based on your installation.

#### If cutting and capping the Neon Flex:

- Miter Cut Shears
- Clear, RTV Silicone Adhesive



Example of Miter Cut Shears

#### If installing aluminum channel:


- Hacksaw
- Electric drill
- Screws specific to application
- Small flat head screwdriver

#### If installing mounting clips:


- Screwdriver or electric drill
- Screws specific to application

## Parts


Some parts are optional and may not be included.




Neon Flex



Silicone End Caps (x2)





Mounting Clips (x10)



3.28FT Aluminum Channel

### Installation Part 1: Cutting & Capping the Neon Flex

1. Locate the cut marks (dashed lines) on the sides of the Neon Flex.
2. With the light surface facing UP and using Miter Cut Shears ONLY, make the cut at the cut mark.



**CAUTION!** Do NOT make cuts between the cut marks.


**CAUTION!** Making a cut with the light surface facing the wrong direction may cause damage.

3. Apply a small amount of the clear, RTV silicone adhesive sealant to the inside of the silicone end cap.
4. Install the silicone end cap onto the cut end of the Neon Flex.



**PRO TIP:** Allow time for the adhesive to cure. Review your specific adhesive for curing time.

### Installation Part 2: Aluminum Channel Installation

1. Measure the length of the connector installed on the Neon Flex.

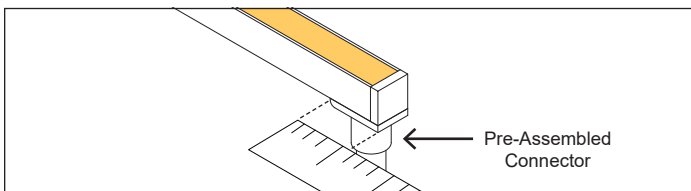

2. Subtract the length of the connector from the overall length of the aluminum channel.
3. On the channel, mark where the cut will be made.
4. Cut the channel using a hacksaw.
5. Install the channel using screws appropriate for your application.
6. Align the Neon Flex so that the connector exits properly.

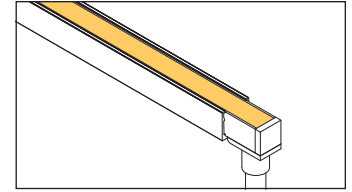

8. Begin fitting the Neon Flex into the channel.
9. Work your way down the channel until the Neon Flex is completely installed.


### Uninstalling the Neon Flex from the Aluminum Channel

1. Carefully wedge a small, flat head screwdriver between the Neon Flex and the aluminum channel.
2. Gently begin prying the Neon Flex out of the channel.
3. Carefully remove the remaining Neon Flex from the channel.


### Installation Part 3: Mounting Clip Installation

#### PRO TIP:

- For simple bends, use 3-4 clips per foot.
- For complex bends, use 5-6 clips per foot.



Simple Bends



Complex Bends

1. Install the clips using screws appropriate for your application.
2. Fit the Neon Flex into each clip.

### Uninstalling the Neon Flex from the Mounting Clip

1. Carefully wedge a small, flat head screwdriver between the Neon Flex and the mounting clip.
2. Gently pry the Neon Flex out of the mounting clip.