




TYPE	
PART NO.	
QTY	
DATE	
SIGNATURE	

PRODUCT SPECIFICATIONS

Inspire V5 Spec 2.8 6mm LED Tape Light

About

- Premier, architectural/specification-grade LED tape light
- 2.8 W/FT
- 2700K, 3000K, 3500K, & 4000K
- Requires an LED driver to power
- Use with select Inspire Channel

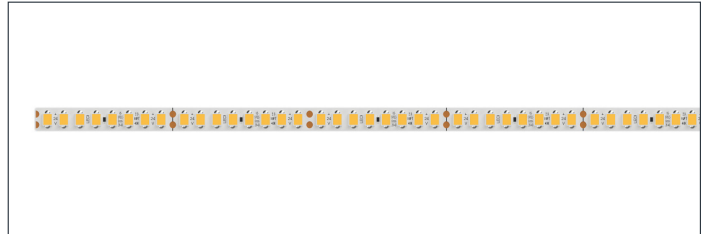

Part Numbers & Ordering

V5 - SPEC - 6mm - 28 -	CCT	Length
	27 2700K	16 16ft Roll
	30 3000K	100 100ft Roll
	35 3500K	CUSTOM Custom Length (by the foot)
	40 4000K	

Ordering Examples

Example Part Number	QTY	Amount to Receive
V5-SPEC-6mm-28-35-CUSTOM	12	12FT
V5-SPEC-6mm-28-35-100	2	(2) 100FT Rolls
V5-SPEC-6mm-28-35-16	5	(5) 16FT Rolls

Connectors, Channel, & Drivers

Compatible Connectors

- Soldered lead wires

Compatible Channel

- Inspire Small Corner Channel

Compatible LED Drivers

- DimALL™ Dimmable Drivers
- Electronic 0-10V Dimmable Drivers
- Non-Dimmable Plug-In Drivers

Part numbers and specifications may be found in the applicable product spec sheet.

Specifications

Lumen Output:

- 2700K: 325 lm/FT (116 lm/W)
- 3000K: 340 lm/FT (121 lm/W)
- 3500K: 350 lm/FT (125 lm/W)
- 4000K: 360 lm/FT (129 lm/W)

CRI: 94+

Power: 2.8 Watts/FT

Maximum Length: 35FT

Cut Length: Every 1-3/4"

Input Voltage: 24VDC

Physical Color: White

Connector: Soldered Lead Wires

Beam Angle: 120°

Lamp Life: 50,000 Hours

Max Ambient Temperature: -4°F to 113°F (-20°C to 45°C)

Max Operating Temperature: -22°F to 140°F (-30°C to 60°C)

Dimensions (W x H): 1/4" x 1/16"

Environment: IP20 Indoor

Adhesive: 3M VHB Red

Dimming:

- 0-10V
- MLV
- ELV
- Incandescent
- CFL/LED

Certifications & Safety Standards:

- UL Listed for The United States and Canada - File # E467147
- UL Listed per UL2108 Low Voltage Lighting Systems/CSA C22.2 No 250.0-08-Luminaires/UL8750
- Title 24 JA8 Compliant
- Always review all local and national safety standards before installing any LED I product(s).