

# Flexible Linear Optics 10°/30°/35°/60°

Flexible LED wall washer/grazer




Type

QTY

Part Number

Signature

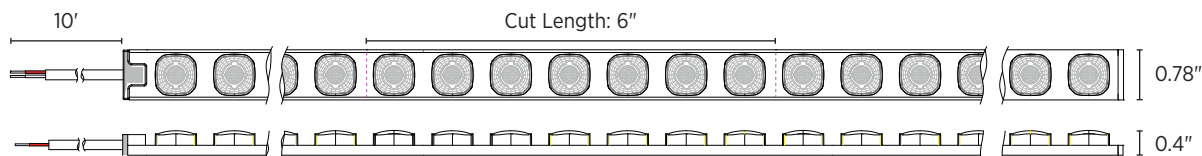

## Specifications

	10° Optics	30° Optics	35° Optics	60° Optics
<b>Beam Angle</b>	10°	30°	35°	60°
<b>Available Color Temperatures</b>	2700K, 3000K, 3500K, and 4000K	2700K, 3000K, 3500K, and 4000K	Tunable White (2700K to 6500K)	2700K, 3000K, 3500K, and 4000K
<b>Lumen Output</b>	3000K: 425 lm/FT Additional data available soon	3000K: 425 lm/FT Additional data available soon	Data available soon	3000K: 540 lm/FT Additional data available soon
<b>Efficacy</b>	3000K: 73 lm/W	3000K: 73 lm/W	Data available soon	3000K: 93 lm/W
<b>Power</b>	5.8 Watts/FT			
<b>Input Voltage</b>	24VDC			
<b>CRI</b>	90+			
<b>Max Run Length</b>	16' 6"			
<b>Cut Length</b>	Every 6"			
<b>Product Color</b>	White			
<b>Lamp Life</b>	50,000 Hours			
<b>Max Ambient Temperature</b>	-13°F to 131°F (-25°C to 55°C)			
<b>Max Operating Temperature</b>	32°F to 131°F (0°C to 55°C)			
<b>Environment</b>	IP67 Indoor or Outdoor			
<b>Dimming</b>	0-10V, MLV, ELV, Incandescent, and CFL/LED			
<b>Compatible LED Drivers</b>	<ul style="list-style-type: none"> <li>• DimALL™ Dimmable Drivers</li> <li>• Electronic 0-10V Dimmable Drivers</li> <li>• Non-Dimmable Plug-In Drivers</li> </ul>			
<b>Mounting</b>	Surface Mount			
<b>Connector</b>	Pre-Assembled Connectors			
<b>Certifications &amp; Safety Standards</b>	<ul style="list-style-type: none"> <li>• UL Listed for The United States and Canada - File # E467147</li> <li>• UL Listed per UL2108 Low Voltage Lighting Systems/CSA C22.2 No 250.0-08-Luminaires/UL8750</li> <li>• Title 24 JA8 Compliant</li> <li>• Always review all local and national safety standards before installing any LEDI product(s).</li> </ul>			

# Flexible Linear Optics 10°/30°/35°/60°

Flexible LED wall washer/grazer



Type  QTY  Part Number  Signature

## Part Numbers

Part Number	Description	Ordering
<b>OPI-58-10D-27-CUSTOM</b>	10-degree Flexible Linear Optic. 2700K. Custom length.	Per foot
<b>OPI-58-10D-30-CUSTOM</b>	10-degree Flexible Linear Optic. 3000K. Custom length.	Per foot
<b>OPI-58-10D-35-CUSTOM</b>	10-degree Flexible Linear Optic. 3500K. Custom length.	Per foot
<b>OPI-58-10D-40-CUSTOM</b>	10-degree Flexible Linear Optic. 4000K. Custom length.	Per foot
<b>OPI-58-30D-27-CUSTOM</b>	30-degree Flexible Linear Optic. 2700K. Custom length.	Per foot
<b>OPI-58-30D-30-CUSTOM</b>	30-degree Flexible Linear Optic. 3000K. Custom length.	Per foot
<b>OPI-58-30D-35-CUSTOM</b>	30-degree Flexible Linear Optic. 3500K. Custom length.	Per foot
<b>OPI-58-30D-40-CUSTOM</b>	30-degree Flexible Linear Optic. 4000K. Custom length.	Per foot
<b>OPI-58-35D-TUNW-CUSTOM</b>	35-degree Flexible Linear Optic. Tunable White (27K to 65K). Custom length.	Per foot
<b>OPI-58-60D-27-CUSTOM</b>	60-degree Flexible Linear Optic. 2700K. Custom length.	Per foot
<b>OPI-58-60D-30-CUSTOM</b>	60-degree Flexible Linear Optic. 3000K. Custom length.	Per foot
<b>OPI-58-60D-35-CUSTOM</b>	60-degree Flexible Linear Optic. 3500K. Custom length.	Per foot
<b>OPI-58-60D-40-CUSTOM</b>	60-degree Flexible Linear Optic. 4000K. Custom length.	Per foot
<b>OPI-KIT-CHN-BLK-AL1-4FT</b>	4-foot channel kit. Black finish. Includes channel, lens, end caps, and channel mounting clips.	Per piece
<b>OPI-KIT-CHN-SLV-AL1-4FT</b>	4-foot channel kit. Silver finish. Includes channel, lens, end caps, and channel mounting clips.	Per piece
<b>OPI-KIT-CHN-WHT-AL1-4FT</b>	4-foot channel kit. White finish. Includes channel, lens, end caps, and channel mounting clips.	Per piece
<b>OPI-LVR-BLK</b>	Louver set. Black finish. For installation inside the channel. Includes (8) 6-inch louvers.	Per set
<b>OPI-LVR-WHT</b>	Louver set. White finish. For installation inside the channel. Includes (8) 6-inch louvers.	Per set
<b>OPI-MNT-ADJ-AL1</b>	Adjustable channel bracket set. For adjusting the angle of a channel. Includes (2) brackets.	Per set
<b>OPI-MNT-CLP-C01</b>	Flexible Linear Optic Mounting Clip set. For mounting the Flexible Linear Optic without a channel. Includes (6) clips.	Per set

