QUANTUM 2 SQUARE 1928 CH-S-1928






Description

The Quantum 2 SQUARE 1928 Channel is a frosted lensed aluminum channel fixture that is powered by Quantum 2 High Density 36 LED tape light. It is dimmable, suspended and surface mountable, and is perfect for lighting up kitchens, conference tables and lobbies.

Specifications

Colors Available		Material	Anodized Aluminum
	2700K Ultra Warm White 3000K Warm White	LED Chip	SMD 2835
	3500K Neutral White 4000K Daylight White	Mounting	Suspended & Surface Mount
Lens Diffusion	100% (No LEDs are visible)	Operating Temp.	32°F-122°F, relative humidity
Power Consumption	9 Watts/Foot	Max Length	8.2 FT
Input Voltage	24V DC	Dimensions WxH	1.9" x 2.8"
Lamp Life	50,000 Hours	Environment	Indoor, Dry
Color Tolerance	±100K	Certifications	C UL US LISTED
Light Distribution	120°	Warranty	5 Year Limited
Can It be cut?	Yes. Every 3-15/16" Inches	Dimming	Yes - See our Dimmer Compatibility List

					TM-3	30-15
COLOR (K)	LUMENS (per ft)	EFFICACY (LM/W)	CRI/Ra	R9	Rf	Rg
4000K	493	55	90+	77	87	98
3500K	485	54	90+	77	87	98
3000K	469	52	90+	77	87	98
2700K	428	48	90+	77	87	98




031217

QUANTUM 2 SQUARE 1928 CH-S-1928




Photometrics

Polar Candela Distribution

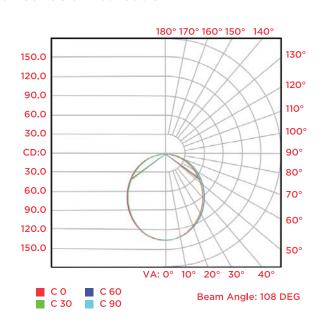


Illumination at a Distance

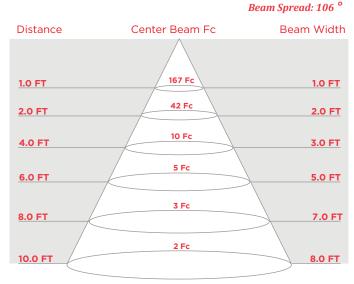

Tested with a 1FT piece at 4000K

TM 30-15

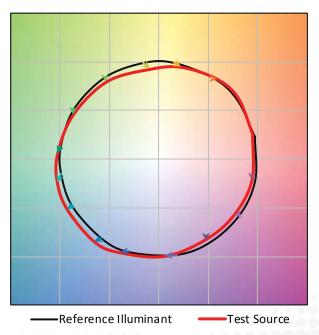

Hue Bin	Fidelity Index	Chroma Change
1	91	-2%
2	92	2%
3	92	1%
4	84	-3%
5	85	-8%
6	90	-5%
7	88	-3%
8	85	2%
9	85	5%
10	89	6%
11	86	7%
12	82	2%
13	82	-1%
14	90	-5%
15	85	-5%
16	86	-3%
A 4 1		

Accessories Quantum 2 Square 1928 CH-S-1928





Electronic MLV & Incandescent Dimmable 120VAC Drivers

20W, 40W, 60W, & 96W: #DR-XXW-24VDC-120V-2-MLV



Electronic 0-10V Dimmable 120-277VAC Drivers

60&100W: #DR-XXW-24VDC-U-2-10 200W: #DR-200W-24VDC-U-2-10



Electronic Non-Dimmable 120-277VAC Drivers

60&100W: #DR-XXW-24VDC-U-2-10 200W: #DR-200W-24VDC-U-2-ND









Order form



3 Ways to Order Quantum Channel







Driver Options

M120 = Magnetic/Incandescent TRIAC Dimmable 120V AC Input UL-Listed NDIM = Non-Dimmable Electronic 120-277V AC Input UL-Listed 010V = 0-10V Electronic 120-277V AC Input UL-Listed NONE = No driver option †

SKU Builder

Channel #	KIT/Length	Color	Driver Type	Suspension KIT
	_			_
CH-A-0606C	KIT (Fixture Kit)	27 (2700K)	M120	0-33
CH-A-1005	2FT	30 (3000K)	NDIM	See next page for list of
CH-A-1212C	4FT	35 (3500K)	010V NONE†	suspension kit options
CH-C-16*	6FT	40 (4000K) RGB***	INOINE	
CH-C-24*	8FT	ROD		
CH-C-48*	Coo novt nogo			
CH-R-1005	See next page for exact			
CH-R-1913	optimized			
CH-R-2513	lengths			
CH-R-3513				
CH-S-0304	Notes: * Suspension Kits a	re REQUIRED for the	se channels.	
CH-S-0605 CH-S-0808K**	** Suspension Kits a	re OPTIONAL for the	ese channels.	
CH-S-1414**	,	atible for these chan 1436, and CH-T-2509		-24, CH-R-1913, CH-S-1414,
CH-S-1426**	Accessories Note: A	II Quantum Accessor	ies such as RGB Co	omponents, Remotely Located
CH-S-1436**	Drivers and Channel			parately. han one fixture then select the
CH-S-1913**	NONE driver type. Yo	ou will have to contac	ct our Design Team	about your project so they can
CH-S-1928**	help you with selecti			m Channel are UL Listed in the U
CH-S-2930**	and Canada.	our EED Drivers for tr	ie Custoffi Quaritur	ir chariter are of fisted in the o
CH-T-2509*	Design Team Contac email: designs@ledin			
2505	ernali. designs@ledir	spirations.com or ph	OHE. 632-717-2710.	00000000000000000

Phone: **832.717.2710** / Fax: **866.523.0169**

SUSPENSION KITS & CUT LENGTHS



Use the Suspension Kit # for ordering.

Suspension Kit #		Mounting	Mounting Shape/Size		Dimensions (LxWxH)		
	6FT	12FT	25FT				
	0 (N	lo Suspensi	ion Kit)	-	-	-	-
	1	2	3	Drywall	Round	Brushed Metal	5" x 5"
	4	5	6	Drywall	Round	White	5" x 5"
	7	8	9	Drywall	Round	Polished Nickel	5" x 5"
	10	11	12	Drywall	Square	Brushed Metal	5" x 5"
	13	14	15	Drywall	Square	White	5" x 5"
	16	17	18	Drywall	Square	Polished Nickel	5" x 5"
	19	20	21	Drop Ceiling	Round	White	5" x 5"
	22	23	24	Drop Ceiling	Square	White	5" × 5"

Suspension kits come in 3 lengths: 6FT, 12FT, or 25FT.

For these suspension kits, the LED drivers must be remotely located.

Standard Fixture Optimized Lengths

In order to minimize shadow spots and create a more beautiful look we build each fixture to an optimized length closest to your desired length.

Channel #	2FT	4FT	6FT	8FT
CH-A-0606C	1' 11-1/32"	3' 9-1/2"	5' 10-13/16"	7' 9-9/32"
CH-A-1005	1' 11-1/32"	3' 9-1/2"	5' 10-13/16"	7' 9-9/32"
CH-A-1212C	1' 11-1/32"	3' 9-17/32"	5' 10-27/32"	7' 9-11/32"
CH-C-16	1' 11-1/2"	3' 10-7/16"	5' 9-13/32"	7' 11-5/8"
CH-C-24	1' 11-1/2"	3' 10-7/16"	5' 9-13/32"	7' 11-5/8"
CH-C-48	1' 8-7/32"	3' 11-3/4"	5' 11-3/8"	7' 10-31/32"
CH-R-1005	1' 11-11/32"	3' 9-13/16"	5' 11-3/32"	7' 9-19/32"
CH-R-1913	1' 8-3/4"	3' 11"	5' 9-15/16"	7' 8-29/32"
CH-R-2513	1' 8-29/32"	3' 8-17/32"	5' 8-5/32"	7' 11-23/32"
CH-R-3513	1' 8-29/32"	3' 8-17/32"	5' 8-1/8"	7' 11-11/16"
CH-S-0304	1' 11-1/32"	3' 9-1/2"	5' 10-13/16"	7' 9-9/32"
CH-S-0605	1' 11"	3' 9-1/2"	5' 10-25/32"	7' 9-9/32"
CH-S-0808K	1' 11-1/32"	3' 9-17/32"	5' 10-27/32"	7' 9-11/32"
CH-S-1414	1' 11-1/2"	3' 10-7/16"	5' 9-3/8"	7' 11-5/8"
CH-S-1426	1' 11-1/2"	3' 10-7/16"	5' 9-3/8"	7' 11-5/8"
CH-S-1436	1' 11-1/2"	3' 10-7/16"	5' 9-13/32"	7' 11-5/8"
CH-S-1913	1' 8-7/32"	3' 11-25/32"	5' 11-13/32"	7' 11-1/32"
CH-S-1928	1' 8-7/32"	3' 11-25/32"	5' 11-13/32"	7' 11-1/32"
CH-S-2930	1' 8-7/32"	3' 11-3/4"	5' 11-3/8"	7' 10-31/32"
CH-T-2509	1' 11-1/2"	3' 10-7/16"	5' 9-13/32"	7' 11-5/8"