


# 60w MLV & INCANDESCENT DIMMABLE DRIVER

DR-60W-24VDC-120v-2-MLV-m



## Description

The 60 Watt MLV & Incandescent Dimmable Driver is a compact and versatile driver. Encased in a slim NEMA-3R enclosure, the driver allows for dimming with any standard magnetic low voltage/incandescent TRIAC dimmer. It is also Class 2 compliant and UL Listed.

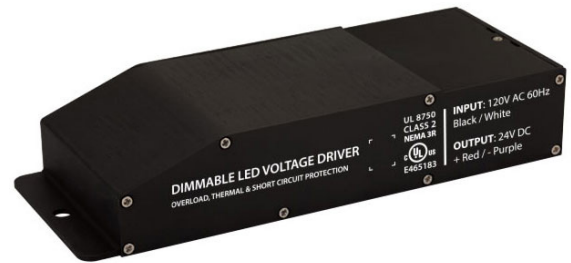

## Specifications




<b>Input Voltage</b>	120V AC	<b>Input Current Max Load</b>	0.61 A
<b>Output Voltage</b>	24V DC	<b>Output Current Max Load</b>	2.63 A
<b>Max Load</b>	60 Watts	<b>Power Factor</b>	0.95
<b>Absolute Min. Load</b>	8 Watts	<b>Protection</b>	Short Circuit, Overcurrent, Over Temperature, and Open Circuit
<b>Operating Temperature *</b>	-4°F to 158°F (-20°C to 70°C)	<b>Dimensions LxWxH</b>	6.77" x 2.67" x 1.26"
<b>Avg. Efficiency</b>	90%	<b>Weight</b>	17 oz.
<b>Dimming</b>	MLV/Incandescent TRIAC **	<b>Ratings</b>	UL Listed, Class 2, and NEMA-3R
<b>Wire Gauge</b>	Input (White/Black) = 18 AWG Output (Red/Black) = 14 AWG	<b>Warranty</b>	5 Year Limited

\*When installed with proper ventilation.

\*\*See our Dimmer Compatibility List for a complete list of compatible dimmers (pg. 2-3).

## Features

- Dimmable with any standard magnetic low voltage/incandescent dimmers
- Slim, compact design
- NEMA-3R enclosure for outdoor use
- Two knock-outs for simple installation
- Class 2 compliant
- UL Listed

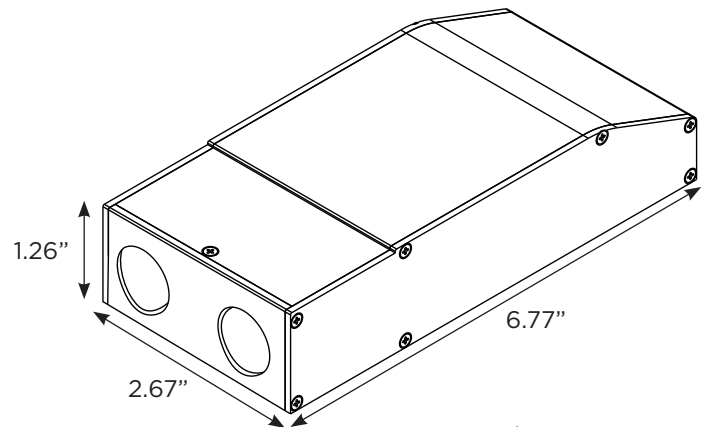

**x2** Clamp Connectors  
Provided with each  
Driver

# DIMMER COMPATIBILITY LIST

## FOR MLV & INCANDESCENT DIMMABLE DRIVERS



### Lutron Dimmers

#### INCANDESCENT DIMMERS

##### Lutron Skylark

S-103P	S-103PNL
S-603P	S-603PNL
S-10P	S-10PNL
S-600P	S-600PNL

##### Lutron Rotary

D-603P	DNG-600P
DNG-603PH-DK	D-600R
D-600	
DNG-603P	

##### Lutron Maestro

MA-1000
MA-600
MSC-1000M
MSC-600M

##### Lutron Nova Dimmer

N-1500	N-1503P
N-2000	N-2003P
N-1000	N-1003P
N-600	N-603P

##### Lutron Diva

DVCL-153PH	DVSCCL-253P	DVSCCL-253P	DV-603P
DVCL-153P	DV-103P	DV-103P	DV-10P
DVCL-253P	DVSC-103P	DVSC-103P	DV-600P
DVSCCL-153P	DVSC-603P	DVSC-603P	DVSC-10P

#### MLV DIMMERS

##### Lutron Vareo Dimmer

V-1000	VETN-1000
V-600	VETS-1000
V-1000-S	VETS-1000-CSA
V-600-S	VETN-1000-S

VETS-1000-S	VETS-1000-SL-S
VETS-R	VETS-A-SL
VETS-R-S	VETS-A-SL-S

##### Lutron Ariadni Dimmer

AYLV-603P	AYLV-600P-CSA
AYLV-603P-CSA	AYLV-600P-S
AYLV-603P-S	
AYLV-600P	

##### Lutron Lyneo Dimmer

LXLV-103PL	NTLV-1500
LXLV-603PL	NTLV-1000
LXLV-10PL	NTLV-1000-277
LXLV-600PL	NTLV-600

NTLV-600-277

##### Lutron Aycl Dimmer

153-PH

##### Lutron Nova Dimmer

NTLV-1000	NTLV-1000-S	NTLV-1503P-CSA	NT-3PS	NT-4PS	NT-1PS-S
NTLV-1500	NTLV-1503P	NTLV-1003P-CSA	NT-3PS-CSA	NT-4PS-CSA	
NTLV-600	NTLV-2003P	NTLV-603P-CSA	NT-3PS-S	NT-4PS-S	
NTLV-1500-S	NTLV-1003P	NTLV-1503P-S	NTLV-1003P-S	NT-1PS	
NTLV-600-S	NTLV-603P	NTLV-2003P-S	NTLV-603P-S	NT-1PS-CSA	

##### Lutron Maestro C-L

MSCL-OP153MH

##### Lutron Diva Dimmer

DVLV-103P	DVLV-103P-S	DVLV-603V	DVLV-10P-S	SC-3PSNL
DVLV-603P	DVLV-603P-S	DVLV-600P	DVLV-10PH-S	SC-4PSNL
DVSCLV-103P	DVLV-103PH-S	DVLV-10P	DVSCLV-10P-L	SC-1PSNL
DVSCLV-603P	DVLV-603PH-S	DVSCLV-10P	SC-3PS	
DVLV-103P-CSA	DVSCLV-103P-L	DVSCLV-600P	SC-4PS	
DVLV-603P-CSA	DVSCLV-603P-L	DVLV-10P-CSA	SC-1PS	

# DIMMER COMPATIBILITY LIST

## FOR MLV & INCANDESCENT DIMMABLE DRIVERS



### Lutron Ceana Dimmer

CNLV-603P  
CNLV-600P

### Lutron Glyder Dimmer

GLV-600  
GLV-600-CSA

### Lutron Skylark Dimmer

S-600P  
SLV-600P  
SLV-603P  
SLV-600P-CSA  
SLV-603P-CSA  
SLV-600PH-CSA  
SLV-603PH-CSA

## Leviton Dimmers

### Incandescent ol Dimmer

OC5504  
1C3005

### Leviton Illumatech Dimmer

IPM06-1LZ  
IPM06-1LX  
IPM10-1LZ

### Leviton Mural Dimmer

MDM06-1LI  
MDM06-1LW  
MDM06-1LA  
MDM10-1LI  
MDM10-1LW  
MDM10-1LA

### Leviton Vizia Dimmer

VPM06-1LZ

### Leviton ToggleTouch Dimmer

TGM10-1LI  
TGM10-1LI  
TGM10-1LA  
TGM10-1LT

### Leviton SureSlide Dimmer

6613-PLT  
6613-PLI  
6613-PLW  
6613-PLA

## Legrand Dimmers

### Pass and Seymour

HLV1103PW  
CDLV1103-PW  
HLV703PTC  
WSLV703PW  
H703PTUTC  
CDLV703-PW  
H703P  
LSLV600-PW

LSLV600-W

### Adorne Whisper

ADWR700MMTUW2