




TYPE	
PART NO.	
QTY	
DATE	
SIGNATURE	

PRODUCT SPECIFICATIONS

Inspire V4 Outdoor RGB (IP67) LED Tape Light

About

- IP67-rated RGB LED tape light
- 3.8 W/FT
- Requires the Outdoor Strip Channel to mount
- Requires an LED driver to power
- Requires a lighting controller to control color

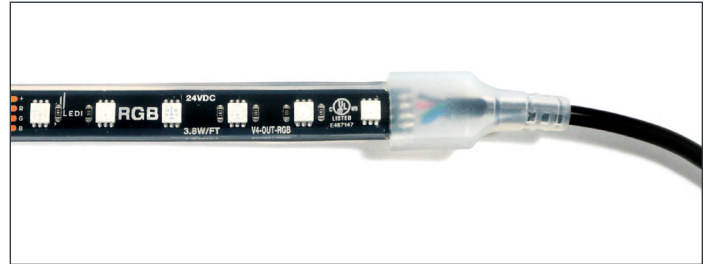

Part Numbers & Ordering

V4 - OUT - RGB - BLK -	Length
5	5FT Roll
15	15FT Roll
25	25FT Roll
CUSTOM	Custom Length (by the foot)

Ordering Examples

Example Part Number	QTY	Amount to Receive
V4-OUT-RGB-BLK-CUSTOM	12	12FT
V4-OUT-RGB-BLK-5	2	(2) 5FT Rolls
V4-OUT-RGB-BLK-25	5	(5) 25FT Rolls

Connectors, Channel, Controllers, & Drivers

Compatible Connectors

- Inspire V4 Outdoor RGB Outdoor Connectors

Compatible Channel (REQUIRED for mounting)

- Outdoor Strip Channel (P/N: STRIPCHAN5FT-OUTDOOR-10MM)

Compatible LED Drivers

- Electronic 0-10V Dimmable Drivers
- Non-Dimmable Plug-In Drivers

Compatible Lighting Controllers

- Casambi Bluetooth Controllers
- Stick 3 Multi-Zone DMX Controller
- Stick CW4 Single-Zone DMX Controller
- T3M Multi-Zone RF Controller
- M3 Single-Zone RF Controller

Part numbers and specifications may be found in the applicable product spec sheet.

Specifications

- Color:** Color-Changing RGB
- Lumen Output:** Up to 94 lm/FT (25 lm/W)
- Power:** 3.8 Watts/FT
- Maximum Run Length:** 25'
- Cut Length:** Every 4"
- Input Voltage:** 24VDC
- Physical Color:** Black
- Casing:** UV-Resistant Silicone
- Beam Angle:** 120°
- Lamp Life:** 50,000 Hours
- Max Ambient Temperature:** -4°F to 113°F (-20°C to 45°C)
- Max Operating Temperature:** -22°F to 140°F (-30°C to 60°C)
- Connector:**
 - Each end of the tape light has a pre-wired 1' connector.
 - (1) 25' hardwire lead is included with 5', 15' and 25' rolls.
 - (1) 10' hardwire lead is included with custom lengths.
 - Additional connectors sold separately.
- Dimensions:**
 - Tape Light (W x H): 5/8" x 1/4"
 - Wired End Cap (L x W x H): 1-3/4" x 3/4" x 3/8"
- Environment:** IP67 Indoor or Outdoor
- Dimming:** Dimmable using a lighting controller
- Certifications & Safety Standards:**
 - UL Listed for The United States and Canada - File # E467147
 - UL Listed per UL2108 Low Voltage Lighting Systems/CSA C22.2 No 250.0-08-Luminaires/UL8750
 - Title 24 JA8 Compliant
 - Always review all local and national safety standards before installing any LEDI product(s).